Model 7975

MICRO-THERM®

PORTABLE FLAMELESS HEAT GUN

- Electronic Ignition
- Portable
- Flameless Heat
- Up to 1200° F
  650° C

APPLICATIONS:

- Shrink tubing
- Activate adhesives & potting compounds
- Form plastics and laminates
- PVC bending
- Preheat flux
- Stretch & repair vinyl
- General heating & drying

MICRO-THERM

PORTABLE FLAMELESS HEAT GUN

Approximately 20 minutes of use per cartridge

DIAGRAM A

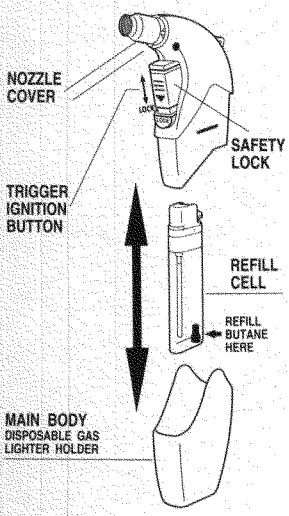

DIAGRAM B



WARNING:

- Read all instructions before use.
- Only use cartridges recommended by Wahl. Wahl Iso-Tip and Century cartridges have been tested for safety.
- Keep out of reach of children.
- Keep Unit away from face, body and combustible material when lighting and during use.
- Do not ignite or use near an open flame, heater, furnace, or combustible material.
- Use in well ventilated area.
- Do not touch the stainless steel nozzle cover during use,or before sufficient time has passed for cooling.
- Always be sure the unit is cool, that the safety switch is set to the "locked" position, and that the cartridge is removed, before storing.
- Do not store in temperatures over 104°F or 40°C (Such as in a car in hot weather) and avoid prolonged exposure directly to the sun.
- Do not discard into fire of incinerator.
- Do not attempt to readjust or repair, the unit is not user serviceable.

INSTRUCTIONS:

- Remove upper body (refer to diagram).
- Place approved cartridge into main body. (Wahl Iso-T and Century cartridges have been tested and approv
- Firmly attach upper body.
- Switch safety lock to the unlocked position.
- Press the ignition button. (If unit does not heat within 10 seconds, adjust the regulator on the cartridge and press the ignition button again.)
- As the gas in the cartridge is consumed, the regulator will need to be adjusted periodically to ensure proper heat.
- To turn off, release the ignition button. (There will be a short delay before the flameless heat is completely extinguished.)
- Use deflector when shrink tubing to acheive higher heat efficiency for quicker results. Deflector also protects surrounding components from heat.
- Switch safety lock to the locked position.
- When not in use, remove the fuel cell.
- Warranty 1 year from date of purchase.

ETL LISTED